

Perma-Grip


UMI - Ferrule Specifications

Internally Expanded Permanent Hose Couplings

Ferrule Specifications (304 Stainless Steel)					
Size	UMI Part Number	Competitor Equiv.	Inside Diameter	Fractional Dim.	Weight (lbs.)
2" **	S200-230 AA	R2AAS & R2AASS-A	2.469	2-15/32	0.38
	S200-234 A	R2AS & R2ASS-A	2.531	2-17/32	0.38
	S200-238 B	R2BS & R2BSS-A	2.594	2-19/32	0.38
	S200-240*	No Equivalent	2.625	2-5/8	0.38
	S200-242 C	R2CS & R2CSS-A	2.656	2-21/32	0.38
	S200-246 D	R2DS & R2DSS-A	2.718	2-23/32	0.38
	S200-250 E	R2ES & R2ESS-A	2.781	2-25/32	0.38
2-1/2" **	S250-302 A	R25AS & R25ASS-A	3.031	3-1/32	0.50
	S250-306 B	R25BS & R25BSS-A	3.098	3-3/32	0.50
	S250-311 C	R25CS & R25CSS-A	3.170	3-1/64	0.50
	S250-316 D	R25DS & R25DSS-A	3.250	3-1/4	0.50
	S250-321 E	R25ES & R25ESS-A	3.328	3-21/64	0.50
	S250-326 F *	No equivalent	3.406	3-3/32	0.50
3" **	S300-335 AAA	R3AAAS	3.547	3-35/64	0.63
	S300-340 AA	R3AAS & R3AASS-A	3.625	3-5/8	0.63
	S300-345 A	R3AS & R3ASS-A	3.703	3-45/64	0.63
	S300-350 B	R3BS & R3BSS-A	3.781	3-25/32	0.63
	S300-354 C	R3CS & R3CSS-A	3.844	3-27/32	0.63
	S300-358 E	No equivalent	3.906	3-29/32	0.63
	S300-360 F	No equivalent	3.938	3-15/16	0.63
	S300-362 G	No equivalent	3.968	3-31/32	0.63
	S300-364 H	No equivalent	4.000	4	0.63

Ferrule weights are approximate. Items marked with an * are special order only.
 ** 2", 2-1/2" and 3" ferrules are also available in brass.
 Ferrules are tested and certified to A.P.I. 1529 and British Standard EN-1361.

Measure and confirm hose O.D. prior to selecting ferrule.
For optimum fit, UMI recommends the hose O.D. be a line-to-line fit up to a 1/32" loose fit to the ferrule I.D.

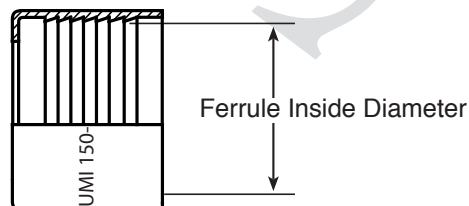

Do not mix UMI coupling components with those produced by other manufacturers.

United Metal Industries, Inc.
 (800) 359-6801 • Fax (516) 354-6715 • www.unitedmet.com