

Perma-Grip


UMI - Ferrule Specifications

Internally Expanded Permanent Hose Couplings

Ferrule Specifications (304 Stainless Steel)						
Size	UMI Part Number	Competitor Equiv.	Inside Diameter	Fractional Dim.	Hose Range	Weight (lbs.)
4"	S400-436 AAA *	No equivalent	4.562	4-36/64	4-33/64 - 4-36/64	2.25
	S400-438 AA *	No equivalent	4.593	4-38/64	4-37/64 - 4-38/64	2.25
	S400-440 A *	No equivalent	4.625	4-40/64	4-39/64 - 4-40/64	2.25
	S400-442 B *	No equivalent	4.656	4-42/64	4-41/64 - 4-42/64	2.25
	S400-444 C *	No equivalent	4.688	4-44/64	4-43/64 - 4-44/64	2.25
	S400-446 D *	No equivalent	4.719	4-46/64	4-45/64 - 4-46/64	2.25
	S400-448 E	R4ESS-A	4.750	4-48/64	4-47/64 - 4-48/64	2.25
	S400-450 F	R4FSS-A	4.781	4-50/64	4-49/64 - 4-50/64	2.25
	S400-452 G	R4GSS-A	4.813	4-52/64	4-51/64 - 4-52/64	2.25
	S400-454 H	R4HSS-A	4.843	4-54/64	4-53/64 - 4-54/64	2.25
	S400-456 I	No equivalent	4.875	4-56/64	4-55/64 - 4-56/64	2.25
	S400-458 J *	No equivalent	4.906	4-58/64	4-57/64 - 4-58/64	2.25
	S400-460 K *	R4KSS-A	4.938	4-60/64	4-59/64 - 4-60/64	2.25
	S400-462 L *	R4LSS-A	4.969	4-62/64	4-61/64 - 4-62/64	2.25
	S400-464 M *	R4MSS-A	5.000	5	4-63/64 - 5	2.25
	S400-466 N *	No equivalent	5.032	5-2/64	5-1/64 - 5-2/64	2.25

Ferrule weights are approximate. Items marked with an * are special order only.
 Ferrules are tested and certified to E.I./A.P.I. 1529 and British Standard EN-1361.

**Hose range is a general guideline only. Always measure and confirm hose O.D. prior to selecting ferrule.
 For optimum fit, UMI recommends the hose O.D. be a line-to-line fit up to a 1/32" loose fit to the ferrule I.D.**

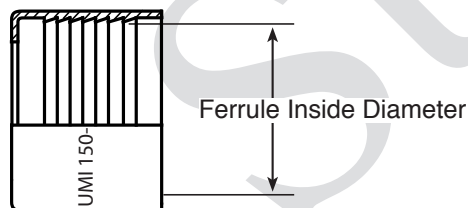

Do not mix UMI coupling components with those produced by other manufacturers.

United Metal Industries, Inc.
 (800) 359-6801 • Fax (516) 354-6715 • www.unitedmet.com