


Perma-Grip

UMI - Ferrule Specifications

Internally Expanded Permanent Hose Couplings

Ferrule Specifications (Brass) Continued					
Size	UMI Part Number	Competitor Equiv.	Inside Diameter	Fractional Dim.	Weight (lbs.)
2-1/2" **	250-302 A	R25AS & R25ASS-A	3.031	3-1/32	0.68
	250-306 B	R25BS & R25BSS-A	3.098	3-3/32	0.68
	250-311 C	R25CS & R25CSS-A	3.170	3-1/64	0.68
	250-316 D	R25DS & R25DSS-A	3.250	3-1/4	0.68
	250-321 E	R25ES & R25ESS-A	3.328	3-21/64	0.68
	250-326 F *	R25FS	3.406	3-3/32	0.68
3" **	300-335 AAA	R3AAAS	3.547	3-35/64	0.86
	300-340 AA	R3AAS & R3AASS-A	3.625	3-5/8	0.86
	300-345 A	R3AS & R3ASS-A	3.703	3-45/64	0.86
	300-350 B	R3BS & R3BSS-A	3.781	3-25/32	0.86
	300-354 C	R3CS & R3CSS-A	3.844	3-27/32	0.86
	300-355 *	No equivalent	3.859	3-55/64	0.86
4"	4" ferrules available in stainless steel only. Please see UMI stainless steel ferrule chart for additional information.				

Ferrule weights are approximate. Items marked with an * are special order only. ** 2-1/2" and 3" ferrules are also available in stainless steel. 4" ferrules are available in stainless steel only.

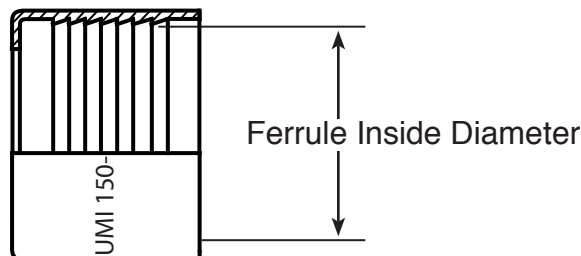

Do not mix UMI coupling components with those produced by other manufacturers.

United Metal Industries, Inc.
 (800) 359-6801 • Fax (516) 354-6715 • www.unitedmet.com