


Perma-Grip

UMI - Ferrule Specifications

Internally Expanded Permanent Hose Couplings

Ferrule Specifications (304 Stainless Steel)					
Size	UMI Part Number	Competitor Equiv.	Inside Diameter	Fractional Dim.	Weight (lbs.)
4"	S400-436 AAA	No equivalent	4.562	4-9/16	2.25
	S400-438 AA	No equivalent	4.593	4-19/32	2.25
	S400-440 A	No equivalent	4.625	4-5/8	2.25
	S400-442 B	No equivalent	4.656	4-21/32	2.25
	S400-444 C	No equivalent	4.688	4-11/16	2.25
	S400-446 D	No equivalent	4.719	4-23/32	2.25
	S400-448 E	R4ESS-A	4.750	4-3/4	2.25
	S400-450 F	R4FSS-A	4.781	4-25/32	2.25
	S400-452 G	R4GSS-A	4.813	4-13/16	2.25
	S400-454 H	R4HSS-A	4.843	4-27/32	2.25
	S400-456 I	No equivalent	4.875	4-7/8	2.25
	S400-458 J	No equivalent	4.906	4-29/32	2.25
	S400-460 K	R4KSS-A	4.938	4-15/16	2.25
	S400-462 L	R4LSS-A	4.969	4-31/32	2.25
	S400-464 M	R4MSS-A	5.000	5	2.25
	S400-466 N	No equivalent	5.032	5-1/32	2.25

Ferrule weights are approximate. Items marked with an * are special order only.

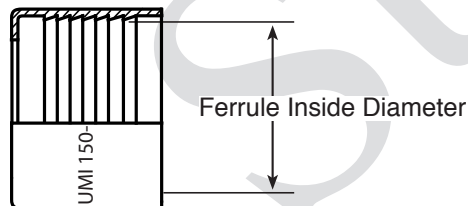

Do not mix UMI coupling components with those produced by other manufacturers.

United Metal Industries, Inc.
(800) 359-6801 • Fax (516) 354-6715 • www.unitedmet.com